


0390203228

AHC2 Two-stage motor with Transmission



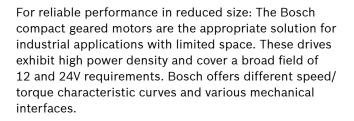


- Degree of protection: IP 50
- Operating mode: S2
- Rotation direction: Left and right rotation
- Nominal voltage: 12 V

Contact us!



Product Specification

Technical data and performance curve




Nominal power (W): 3,9 Nominal current (A): 2,8 Nominal speed (rpm): 37,3 Nominal torque (Nm): 1 Stall torque (Nm): 10,35 Transmission ratio: 182:2 Hall Sensor: No Transmission position: Right

Product images and pictures are for demonstration purposes only, the actual product may differ from the picture shown. The quotation drawing is binding.







Dimensions

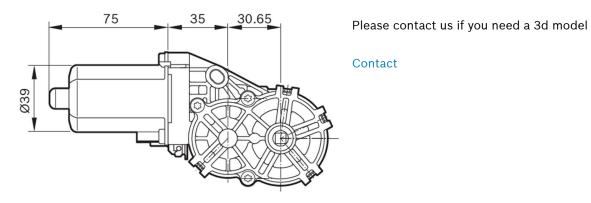

Circuit diagram



Connector




Housing: TE 968182-1 Locker: TE 968183-1 PIN: TE JPT 0-927768-1

Product images and pictures are for demonstration purposes only, the actual product may differ from the picture shown. The quotation drawing is binding.



Drive interface



Features and benefits

- Rotation in both direction: The Bosch small geared motors can be used as a drive
- Available with hall sensor: For positioning or direction of rotation feedback
- Production in line with the original automotive quality guidelines: For proven quality, high reliability and a long service life
- Operating mode S2 or S3: Suitable for short-term or intermittent operation

Downloads

You may also be interested in:

To Product family: Catalogue

